



COOK

SPD

DATE: _____

PROJECT: _____

LOCATION: _____



**Packaged Propeller
Wall Exhaust Fan
Direct Drive**

DIMENSION DATA

Size	A Sq.	B Sq.*	C Sq.	D*	Wall Opening	Wall Housing Gauge	Approx. Ship Wt.
8	15-1/2	13	10	13-3/4	13-1/4	18 Ga.	53
10	19-1/2	17	14	17-3/4	17-1/4	18 Ga.	65
12	19-1/2	17	14	17-3/4	17-1/4	18 Ga.	76
14	23-1/2	21	18	22-1/4	21-1/4	18 Ga.	82
16	23-1/2	21	18	22-1/4	21-1/4	18 Ga.	95
18	27-1/2	25	22	23-1/4	25-1/4	18 Ga.	120
20	27-1/2	25	22	23-1/4	25-1/4	18 Ga.	139
24	33-1/2	31	27-1/2	27-1/4	31-1/4	18 Ga.	151


ALL DIMENSIONS IN INCHES. SHIP WEIGHTS IN LBS.
* B-SQ & D DIMENSIONS ARE TO THE OUTSIDE OF FASTENERS ON WALL HOUSING.

STANDARD CONSTRUCTION FEATURES:

Aluminum propeller blades attached to a steel hub - Plated steel motor mount/wire guard - Spun steel Venturi/wall base - Galvanized steel wall housing - Galvanized steel exhaust shutter - 1/2" mesh galvanized screen on inlet - Single phase open-dripproof motor - Corrosion resistant fasteners - Welded wall base corners.

ACCESSORIES

- | | |
|---|-----------------------------------|
| 1. DISCONNECT SWITCH | 9. PHENOLIC EPOXY POWDER |
| 2. DISCONNECT SWITCH PREWIRED | 10. PHENOLIC EPOXY POWDER WITH UV |
| 3. DISCONNECT SWITCH PREWIRED IN FLEX CONDUIT | 11. PRIMER COATING |
| 4. GALVANIZED AUTOMATIC SHUTTER | 12. FAN SPEED CONTROL |
| 5. ALUMINUM AUTOMATIC SHUTTER | 13. SHUTTER GUARD |
| 6. GALVANIZED SHUTTER MOTORIZED | 14. WEATHER HOOD |
| 7. ALUMINUM SHUTTER MOTORIZED | 15. SPECIAL |
| 8. EPOXY POWDER | |

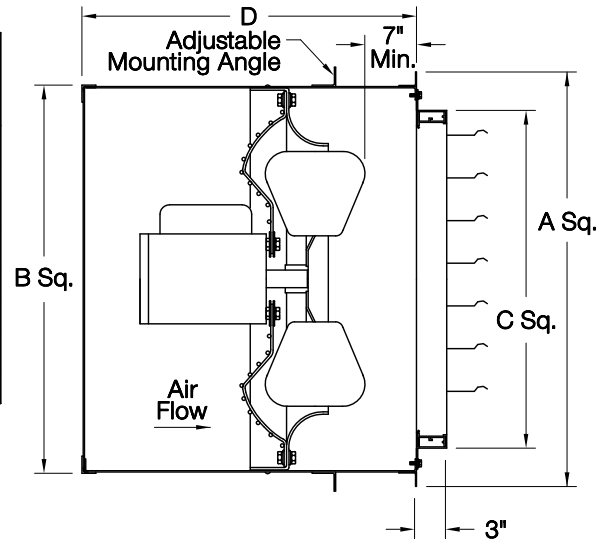

Note: Correct propeller rotation is CCW when viewing from inlet side.

NOTE: MOUNTING ANGLE IS 2 PIECES, SHIPPED LOOSE

QTY	MARK	CATALOG NUMBER	FAN INFORMATION			MOTOR INFORMATION					ACCESSORIES		
			CFM	SP	RPM	HP	VOLTS	HZ	PH	TYPE			

MOTOR TYPE: ODP (OPEN DRIP-PROOF).

WP003R05