LECQ

DATE: _____

PROJECT: _____

LOCATION: _____

Coated Steel Lab Exhauster Curb
QMXLE, QMXHPLE
QMXVP, QMXHPVP
Dual (1x2) Configuration
18" High

Top View

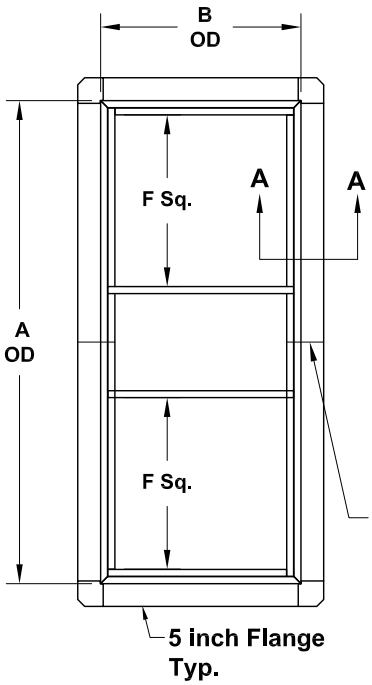

Split location in middle on sizes 365-600. Curbs shipped split requlre a contlnuous field weld of the seams durlng Installatlon.

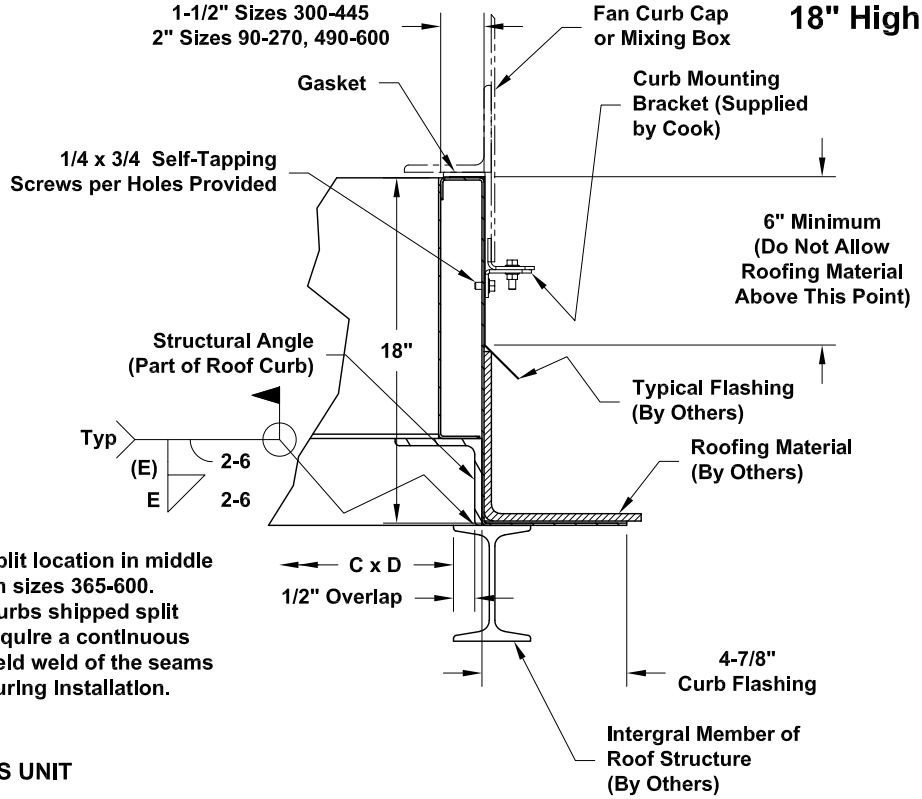

*CURB TO BE COATED SAME AS UNIT

Note: All Lab Exhaust Curbs require a steel integral member of the roof structure with an inside dimension of "C" x "D". The curb must have the structural angle field welded to the steel roof structure. Steel roof structure to be determined by the engineer of record.

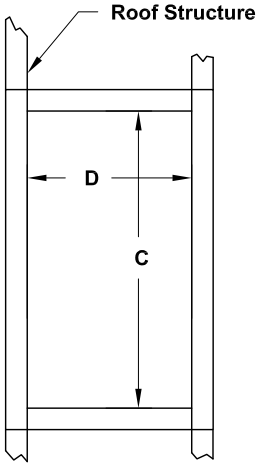

Roof Opening



Curb Corner

DIMENSION DATA

Size	A	B	C	D	E	F	Gauge Thickness	Approx. Ship Wt.
90	63-5/16	27-3/16	61-7/16	25-5/16	1/4	20 13/16	7	559
120	63-5/16	27-3/16	61-7/16	25-5/16	1/4	20-13/16	7	559
135	63-5/16	27-1/8	61-7/16	25-1/4	1/4	20-3/4	7	559
150	67-5/16	29-1/8	65-7/16	27-1/4	1/4	22-3/4	7	599
165	71-5/16	31-1/8	69-7/16	29-1/4	1/4	24-3/4	7	639
180	83-5/16	33-1/8	81-7/16	31-1/4	1/4	26-3/4	7	737
202	89-1/8	36-15/16	87-1/4	35-1/16	1/4	30-9/16	7	796
225	92-1/8	40-15/16	90-1/4	39-1/16	1/4	34-9/16	7	845
245	107-1/8	42-15/16	105-1/4	41-1/16	1/4	36-9/16	7	970
270	111-1/8	46-15/16	109-1/4	45-1/16	1/4	40-9/16	7	1027
300	131-1/8	50-15/16	129-1/8	48-15/16	3/8	44-11/16	10	1064
330	135-1/8	54-13/16	133-1/8	52-13/16	3/8	48-9/16	10	1114
365	158	60-3/4	156	58-3/4	3/8	54-1/2	10	1327
402	163	65-5/8	161	63-5/8	3/8	59-3/8	10	1399
445	170	72-5/8	168	70-5/8	3/8	66-3/8	10	1492
490	191	78-1/2	188-7/8	76-3/8	3/8	72-1/8	7	2043
540	200-7/8	85-3/8	198-3/4	83-1/4	3/8	79	7	2188
600	211-7/8	94-3/8	209-3/4	92-1/4	3/8	88	7	2387

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.,

X0165R01